

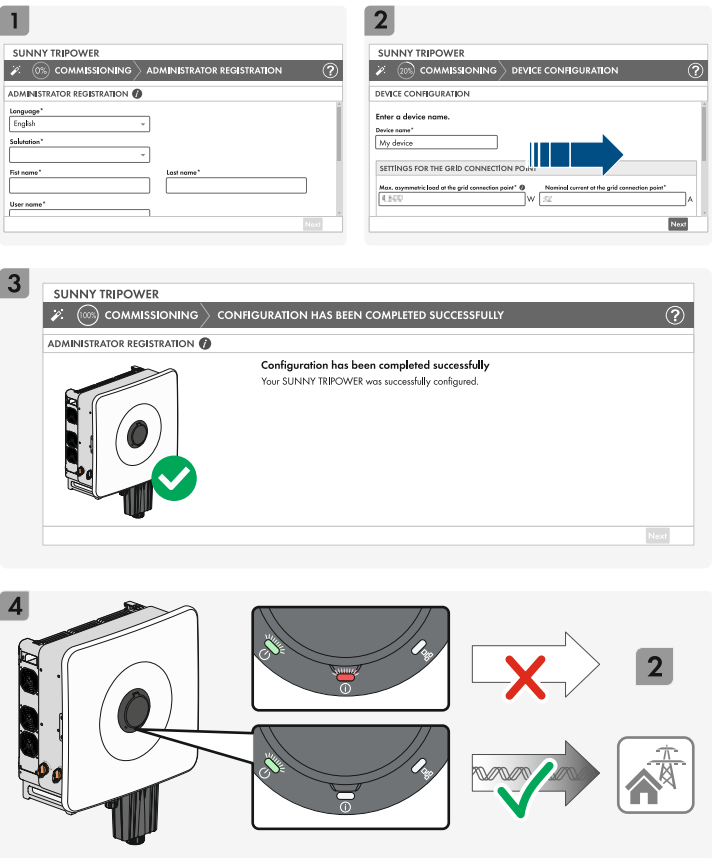
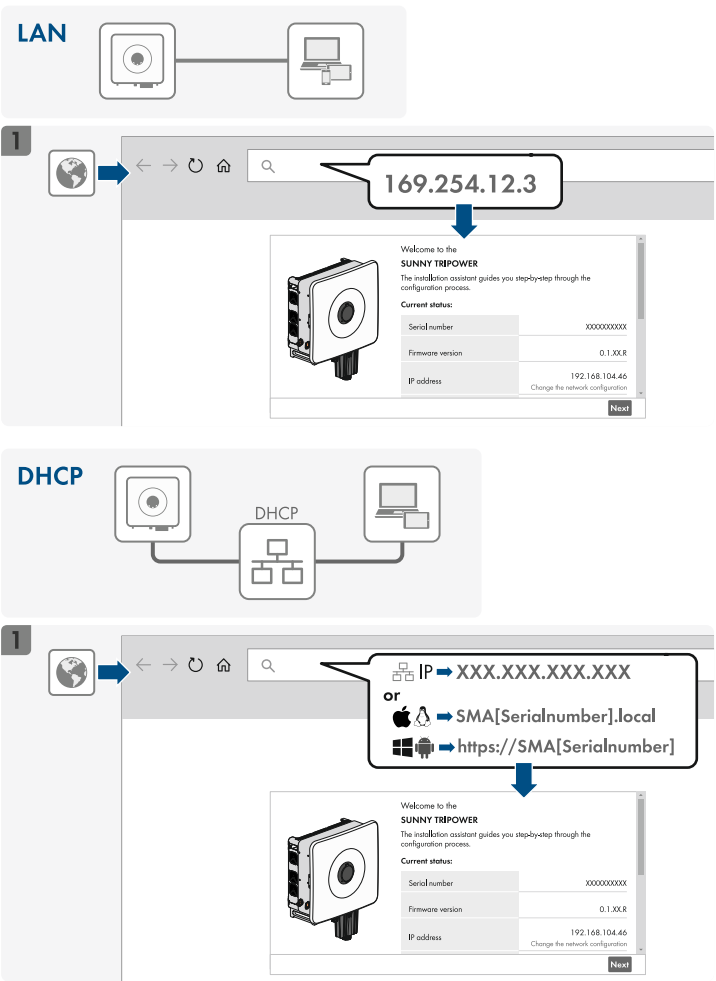


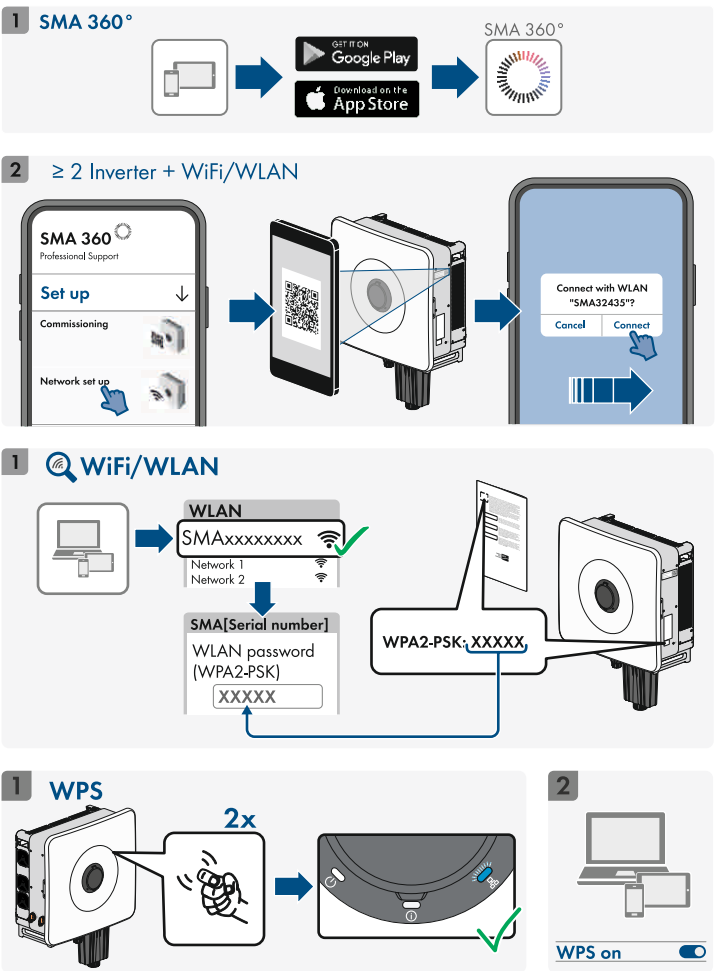

Topology	without transformers
Overvoltage category in accordance with IEC 62109-1	II (DC), III (AC)
Protection class in accordance with IEC 62109-1	I
All-pole sensitive residual-current monitoring unit	integrated
Maximum permissible value for relative humidity, condensing	100%
Extended humidity range according to IEC 60721-3-4	0% to 100%
Pollution degree inside the enclosure	2
Pollution degree outside the enclosure	3
Demand Response Mode per AS/NZ 4777.2	DRM0
Power control/Demand Response (DRED)	Communication via Modbus

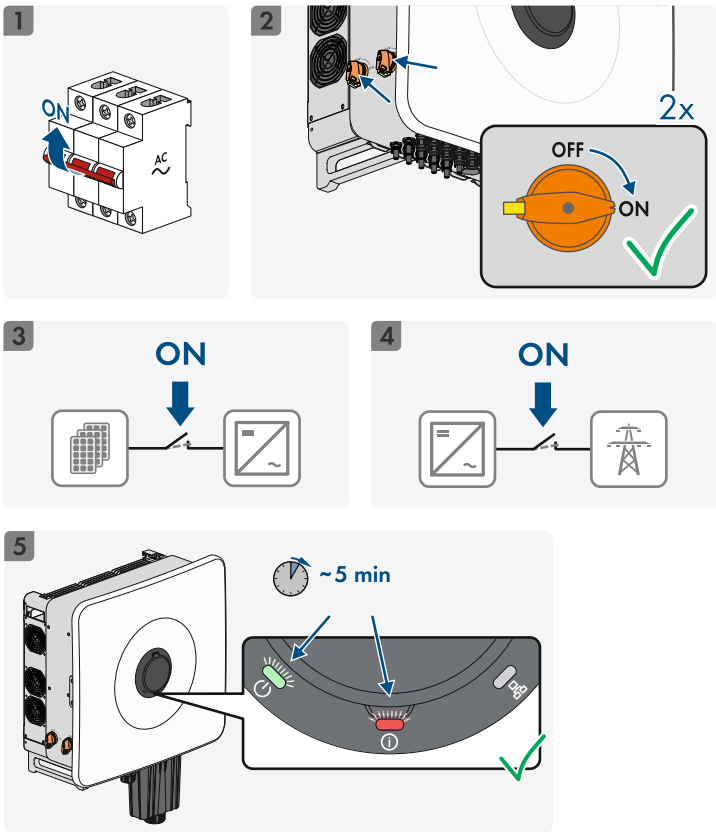

<https://go.sma.de/service>